

SPECIFICATIONS:

*PORT: \varnothing 1.33" O.D. CF FLANGE

*MATERIALS:

BODY: 304 SST, ELECTROPOLISHED

BELLOWS: WELDED AM-350 SST

BONNET SEAL: VITON

POPPET SEAL: VITON

OTHER MATERIALS AVAILABLE

ACTUATION: SELF-LUBRICATING BRONZE NUTS

WITH ACME THREADS

DIFFERENTIAL PRESSURE: MAXIMUM 20 PSIA ACROSS VALVE SEAT

MAXIMUM TEMPERATURE VITON SEALS:

SUSTAINED: $\leq 150^{\circ}\text{C}$ [302 $^{\circ}\text{F}$]

INTERMITTENT: $\leq 204^{\circ}\text{C}$ [399 $^{\circ}\text{F}$]


VACUUM RANGE: VITON BONNET SEAL: $\geq 1 \times 10^{-9}$ TORR HIGH VACUUM

OPTIONS: FITTINGS AND O-RINGS

NOTES:


1. ALL WELDS TO BE VAC. TIGHT TO 2×10^{-10} MIN. SENSITIVITY.

2. DIMENSIONS IN [X.XX] ARE IN mm.

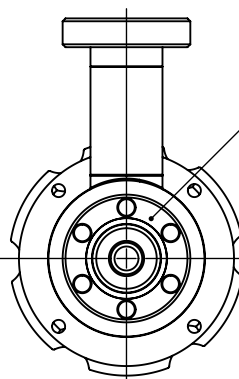

2X \varnothing 1.33" O.D. CF
FLANGE, ROTATIONAL
THRU HOLES

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
THERMIONICS LABORATORY INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
THERMIONICS LABORATORY INC. IS
PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL \pm N/A ANGULAR: MACH \pm BEND $\pm .5^{\circ}$ ONE PLACE DECIMAL $\pm .1$ TWO PLACE DECIMAL $\pm .01$ THREE PLACE DECIMAL $\pm .005$ SURFACE FINISH 63 R.M.S.		FINISH:				DO NOT SCALE DRAWING		REVISION	
						<i>thermionics laboratory inc.</i> <i>Hayward Ca. 94545</i>			
	NAME	SIGNATURE	DATE		USED ON	NEXT ASSY.	TITLE: <i>ANGLE VALVE, RIGHT ANGLE, MANUAL ACTUATION</i>		
DESIGN/ENG.						GEN. USE			
CHK'D									
APPV'D									
MFG									
Q.A.				MATERIAL:			DWG NO. A-750-H-133		A3
				WEIGHT:			SCALE:1:2		SHEET 1 OF 1