

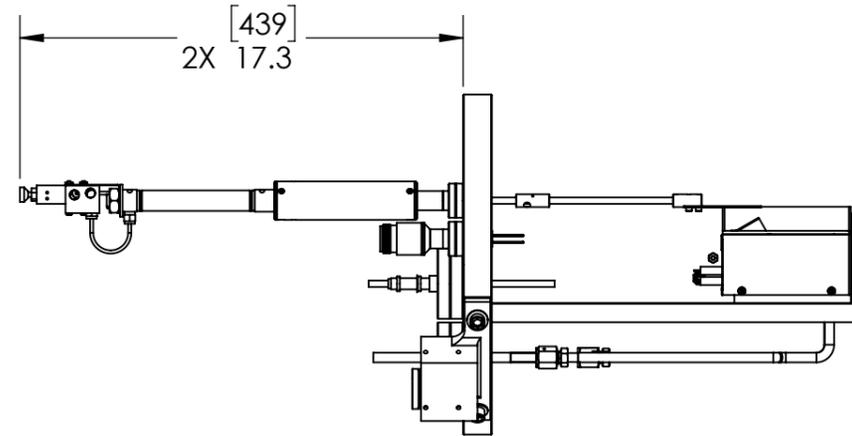


2X PNEUMATIC SOURCE SHUTTER

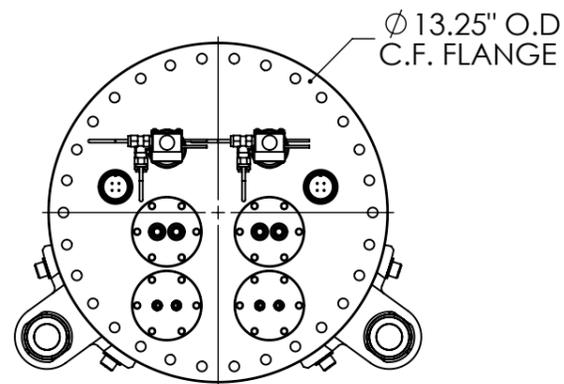

[9.6]
2X .4 TOP
OF CRUCIBLE

2X LINEAR BEARING
BLOCK, 3-POINT
BEARING ADJUSTMENT

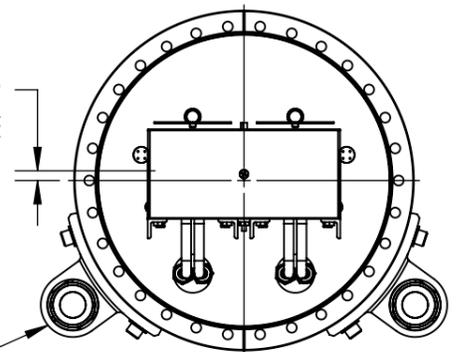

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF THERMIONICS LABORATORY INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF THERMIONICS LABORATORY INC. IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± N/A ANGULAR: MACH ± BEND ± .5° ONE PLACE DECIMAL ± .1 TWO PLACE DECIMAL ± .01 THREE PLACE DECIMAL ± .005 SURFACE FINISH 63 R.M.S.		FINISH:				DO NOT SCALE DRAWING	REVISION
DESIGN/ENG.	NAME	SIGNATURE				DATE	USED ON
CHK'D					FINAL	TWIN HM2 e-GUN(TM), 15kW, 40cc OUTLINE DRAWING	
APPV'D						DWG NO.	A3
MFG						D1540	
Q.A					MATERIAL:	SCALE: 1:7	
					WEIGHT: 73 lbs.	SHEET 1 OF 1	