

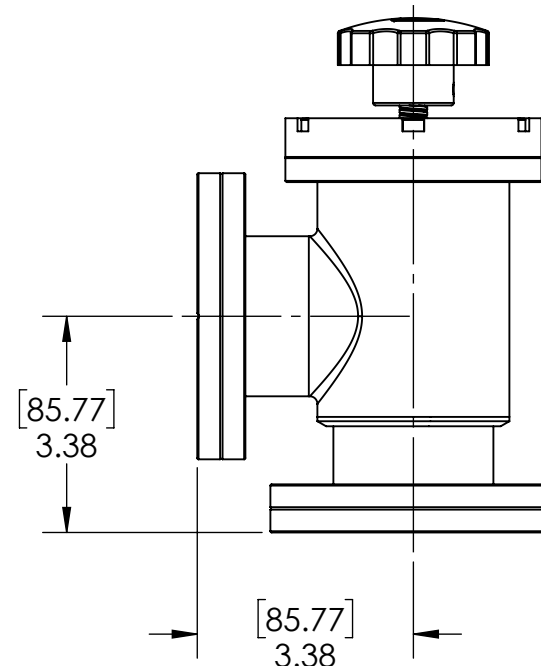
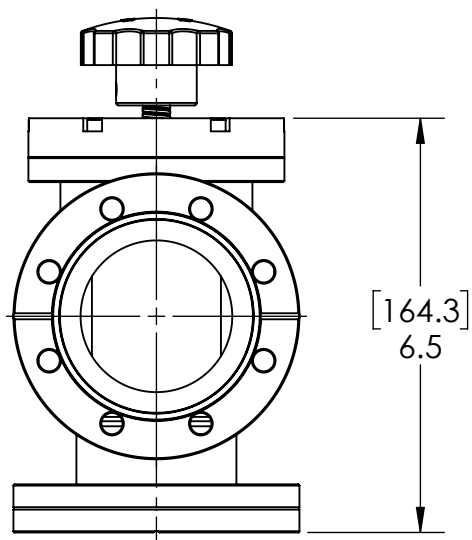
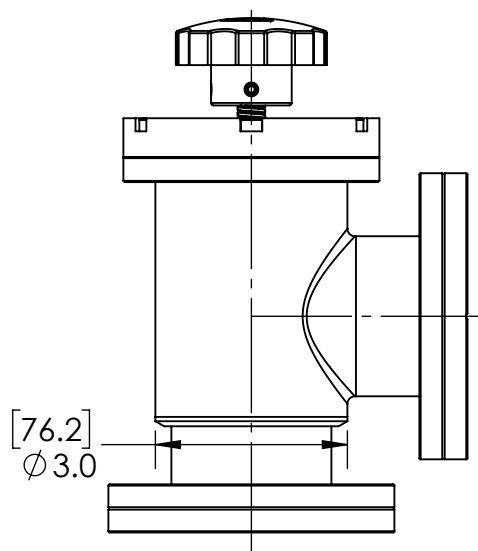
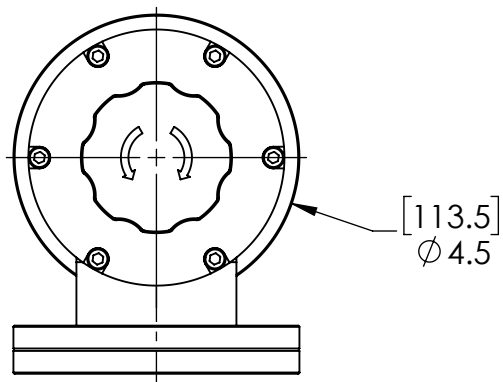


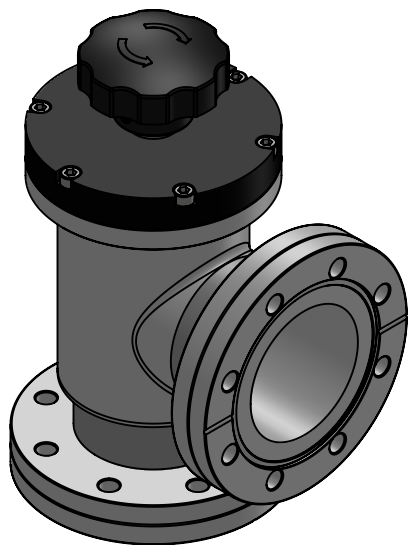

2X Ø 4.5" O.D. C.F.
FLANGE, ROTATABLE,
THRU HOLES

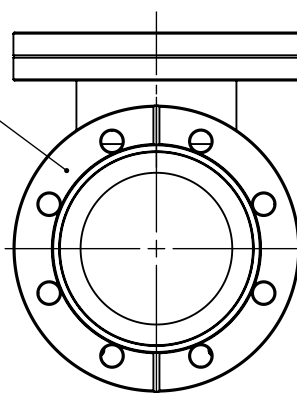

SPECIFICATIONS:
*MANUAL ACTUATION
*Ø 4.50" O.D. C.F. ROTATABLE, FLANGES
*VITON GATE AND BONNET SEAL
*VACUUM RANGE: 1 X 10⁻⁹ TORR
*LEAK TEST: 1 X 10⁻⁹ STD CC/SEC HE
*BAKE TEMPERATURE: 120°C (248°F)
*SST EXPOSED TO VACUUM

NOTE:
1. DIMENSIONS IN [X.XX] ARE IN mm.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
THERMIONICS LABORATORY INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
THERMIONICS LABORATORY INC. IS
PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± N/A ANGULAR: MACH ± BEND ± .5° ONE PLACE DECIMAL ± .1 TWO PLACE DECIMAL ± .01 THREE PLACE DECIMAL ± .005 SURFACE FINISH 63 R.M.S.		FINISH:		 thermionics laboratory, inc.		DO NOT SCALE DRAWING		REVISION					
						<i>thermionics laboratory inc.</i> <i>Hayward Ca. 94545</i>							
		NAME		SIGNATURE		DATE		USED ON		NEXT ASSY.		TITLE:	
DESIGN/ENG.										GEN. USE		<i>ANGLE VALVE, RIGHT ANGLE, MANUAL ACTUATION</i>	
CHK'D													
APPV'D													
MFG													
Q.A				MATERIAL:				DWG NO.		A-250-H-CF		A3	
				WEIGHT:				SCALE:1:3		SHEET 1 OF 1			